

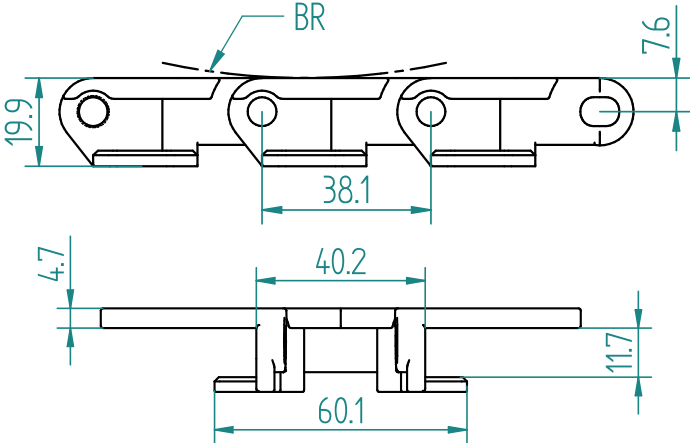


Thermoplastic Small Radius Side Flex
880 TAB-RT-K450

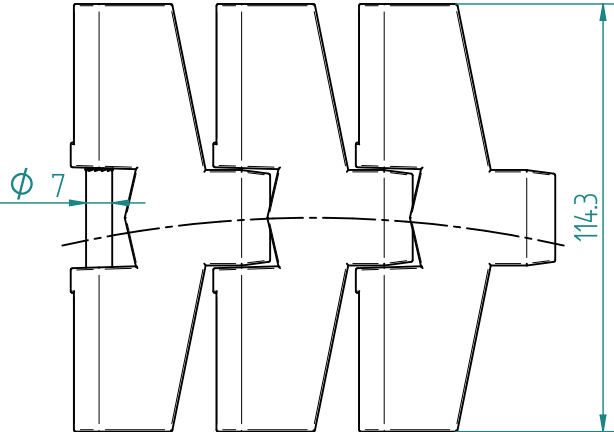


Part No.	880 TAB-RT-K450
Width	114.3 mm / 4.5" in
Radius	R-200
Pitch	38.1 mm / 1.5" in
Link/Ft	26 NOS/ MTR
Pin	6.35 mm / 0.25" in
Back Flex	75 mm / 2.44" in

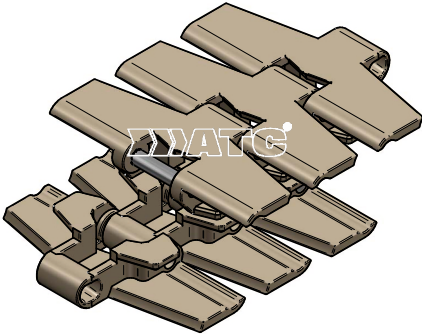


880-RT MOULDED SPROCKETS
(Thickness-16 mm)

Teeth	Pitch	OD	PCD
10	1.5" in	122	114.5
11	1.5" in	134	127.25
12	1.5" in	146	139.5

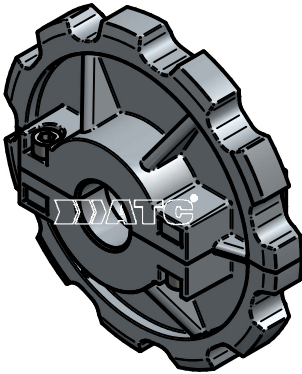


880-RT SOLID SPROCKETS
(Thickness-14 mm)

Teeth	Pitch	OD	PCD
10	1.5" in	122	
11	1.5" in	134	127.25
12	1.5" in	146	



880-RT MS SPROCKETS
(Thickness-16 mm)


Teeth	Pitch	OD	PCD
10	1.5" in	122	114
11	1.5" in	134	
12	1.5" in	146	139.5



Suggested Products:-




Collar Type Wear Strip




ATC-WCP-2603

Clip Type Wear Strip




ATC-WCP-40204

Z Type Wear Strip



ATC-WZ-2312
ATC-WZ-2512
ATC-WZ-3013

C Gripper (Side Guide With Aluminium Profile)



ATC-WCG-6051
ATC-WAP-CG-6051

Side Bracket



ATC-SB-KB-150
ATC-SB-EB-150
ATC-SB-AB-210
ATC-SB-EB-210

Double Guide Rail Clamp



ATC-SRH-2737
ATC-DGRC-4012
ATC-DGRC-6912
ATC-DGRC-4210

Roller Transfer Plate Bridge





ATC-RTP-85

Suggested Products:-



Corner Track

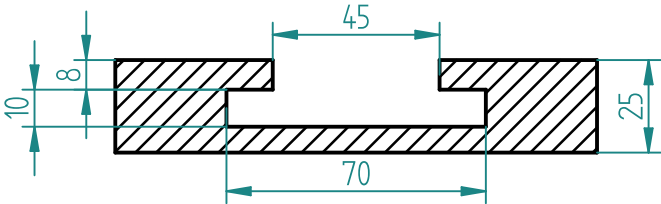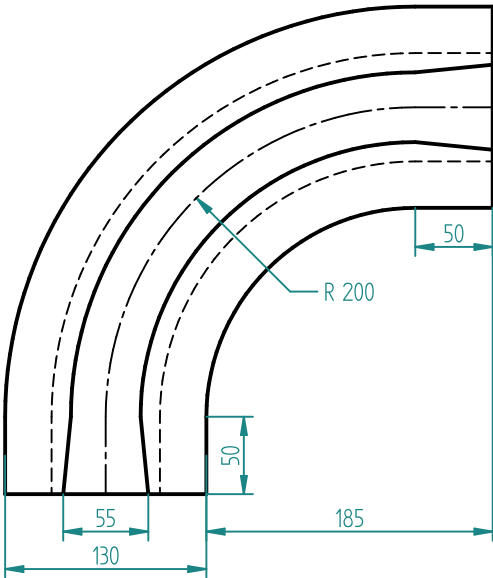

Code	Radius	Thickness	ROW-WIDTH		
			Single	Double	Three
TH 880 TAB RT - K450	200	25 mm	130	250	370